

LED HUGGING TREE LIGHT

L06A/C-AT6

Mounting instruction

GB
7000

IEC
60598



IP66

ta
50°











IK08

CE


Type Number 产品型号	LEDs 颗粒数	Power 功率	Voltage 电压	CT 色温	kg
L06A-009AP2. 2L	9	18W	AC220V	3000K/4000K/RGB	3.0
L06A-009AP3. 3L	9	27W	AC220V	3000K/4000K/RGB	3.0
L06A-009AP4. 0L	9	36W	AC220V	3000K/4000K/RGBW	3.4
L06A-012AP1. 1L	12	12W	AC220V	3000K/4000K/RGB	3.0
L06A-012AP2. 2L	12	24W	AC220V	3000K/4000K/RGB	3.0
L06A-018AP1. 1L	18	18W	AC220V	3000K/4000K/RGB	3.1
L06A-018AP2. 2L	18	36W	AC220V	3000K/4000K/RGB	3.1
L06A-024AP2. 2L	24	45W	AC220V	3000K/4000K/RGB/RGBW	3.1
L06A-018CP2. 2L	18	36W	AC220V	3000K/4000K/RGB	5.1
L06A-018CP3. 3L	18	54W	AC220V	3000K/4000K/RGB	5.0
L06A-018CP4. 0L	18	72W	AC220V	3000K/4000K/RGB	5.2
L06A-024CP2. 2L	24	48W	AC220V	3000K/4000K/RGB/RGBW	5.0
L06A-036CP2. 2L	36	72W	AC220V	3000K/4000K/RGB/RGBW	5.1

L06A-A


L06A-C

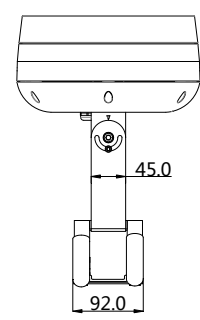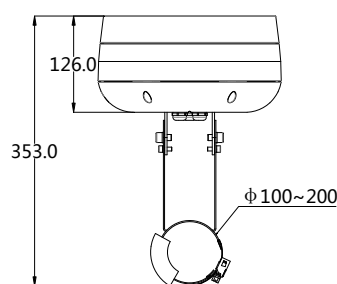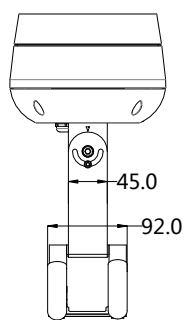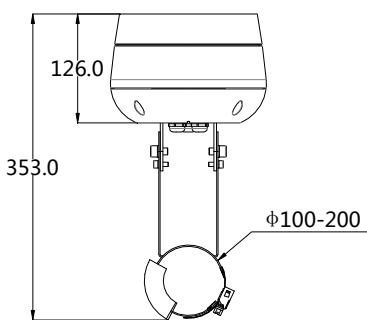


A

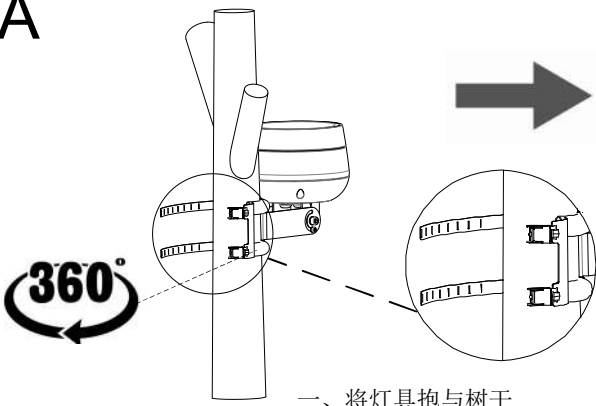

一、将灯具抱与树干

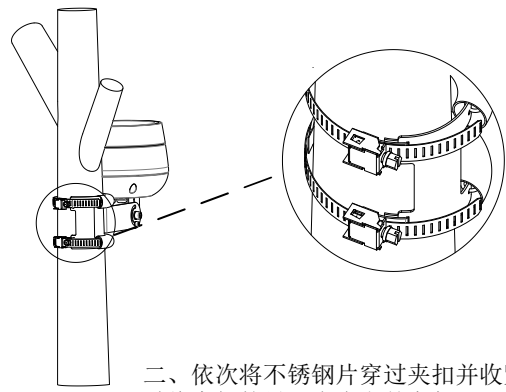


二、依次将不锈钢片穿过夹扣并收紧，同时将夹扣的另一半合上并卡紧

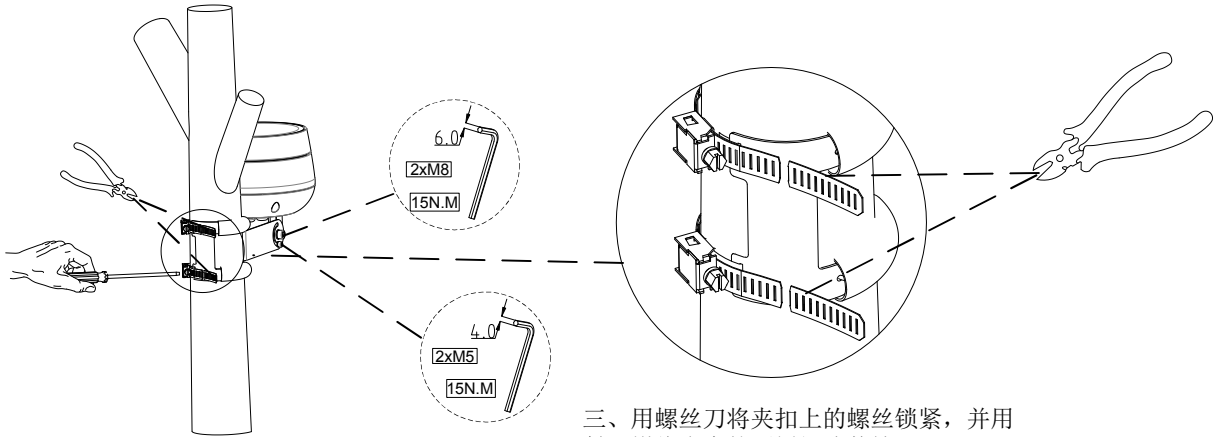

三、用螺丝刀将夹扣上的螺丝锁紧，并用斜口钳将多余的不锈钢片剪掉

接线示意图

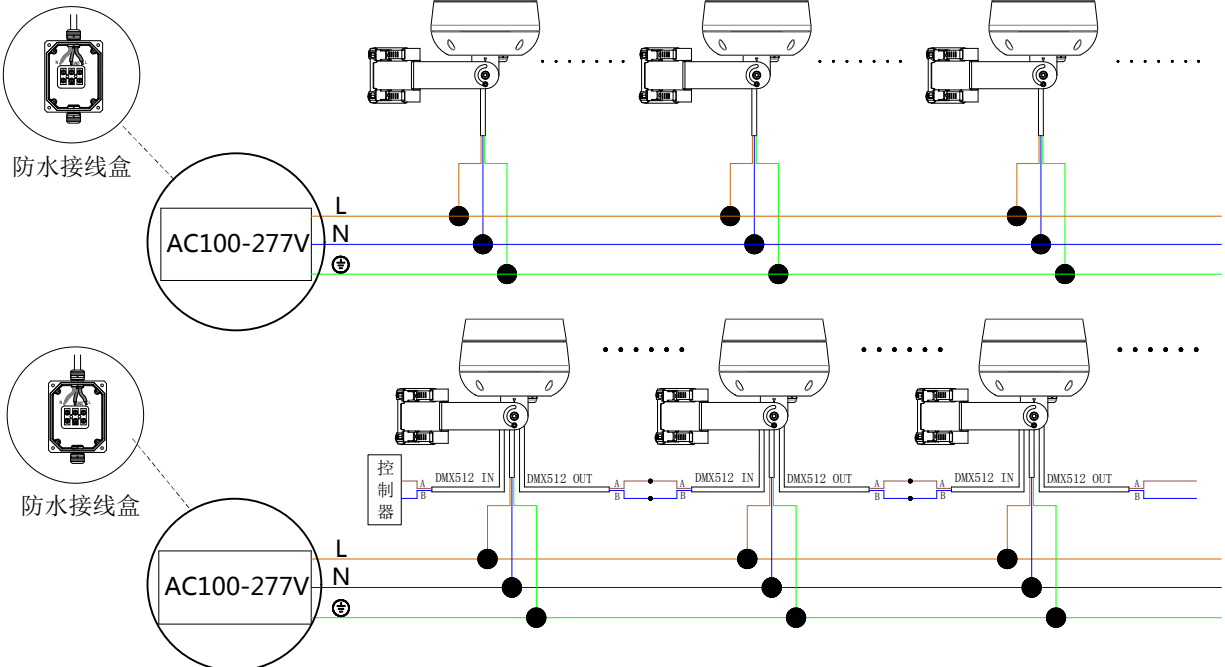

1. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.

灯具应由合格的电工安装，接线要符合IEE电气标准或国家标准。

2. No supplied water-proof box, installation should be advised by qualified professional.

不提供防水接线盒，安装应征求有资格的人的建议。

3. The external flexible cable can not be replaced. If the cable is damaged, the luminaire should be discarded.

灯具外部软线不可替换，如有损坏，灯具报废。